

1006TG2A POWER UNIT

TECHNICAL DATASHEET

Production Tolerance : $\pm 5\%$

Stand-By (Maximum) Rating	Max.Torque	Fuel Consumption
112 kW (150 HP) / 2200 rpm	529 N.m (53,4 kg.m) / 1800 rpm	215 g/kW.h (158 g/HP.h) / 2200 rpm

Note : All datas are according to DIN6270B

MECHANICAL SYSTEM

Manufacturer	Lovol / China
Engine Model	1006TG2A
Type	4 cycle , Diesel , Turbocharged
Combustion Type	Direct Injection
Firing Order	1-5-3-6-2-4
Cylinder Number	6 cyl
Bore x Stroke	100 x 127 mm
Displacement	5,99 lt
Compression Ratio	17,5
Flywheel & Hsg	SAE 3/11,5"
Dry Weight	419 kg
Dimensions LxWxH	945x755x854 mm


COOLING SYSTEM

Cooling Type	Water Cooled
Cooling Method	Forced circulation by Centrifugal Pump
Cooling Capacity	27,7 lt (incl.radiator)


FUEL SYSTEM

Injection Pump	Bosch B4C Inline Type
Injection Nozzle	Throttle Type
Nozzle Open Pres	258 kg/cm ²
Governor Type	Mechanical
Fuel Selenoid	Energized to Run
Fuel Filter	Full flow,cartridge type
Fuel Delivery	Mechanic Feed Pump
Fuel	Diesel Fuel (EN590)

PERFORMANCE CURVE

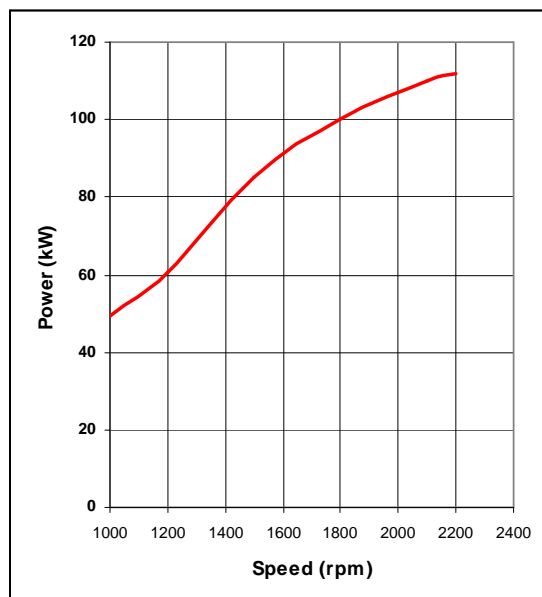

1006TG2A POWER UNIT

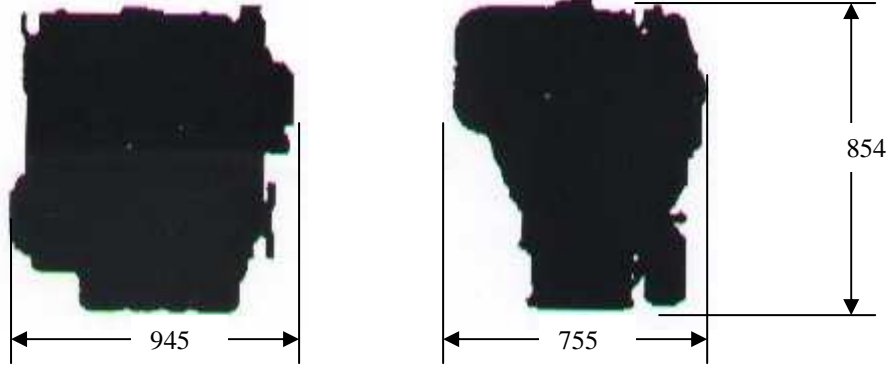

LUBRICATION SYSTEM

Lubrication Method	Forced-feed circulation by gear pump
Oil Pump	Gear Driven
Oil Capacity	16 lt
Oil Filter	Full Flow cartridge
Recommended Oil	CD/CE/CF 10W/40 grade semi-synthetic or synthetic

ELECTRICAL SYSTEM

Charging Alternator	14 V , 65 Amp
Starting Motor	12 V , 3,7 kW
Battery Voltage	12 V
Capacity (Recommended)	102 Ah

OPTIONS

- (EWI) Engine Wiring
- (CPA) Basic Start Panel
- (ESI1) Industrial type Silencer
- (ESI2) Residential type Silencer
- (BAT) Battery , cables & rack
- (BFR1) Baseframe Std.c/w fuel tank
- (BFR2) Extended Baseframe c/w fuel tank
- (HEX) Heat Exchanger Kit with pipeline
- (CPL) Coupling with its guard
- (TBX) Tool Kit

UNIT CONVERSION

- HP = kW x 1,3596
- Torque (N.m) = 9549,3 x P(kW) / N(1/min)
- Torque (kg.m) = 716,2 x P(HP) / N(1/min)
- 1 Bar = 1,019726 kg/cm² = 100 kPA
- 1 kW = 0,2388 kcal/s

IDEA

IDEA MAKİNA İMALAT SAN.VE TİC.LTD.ŞTİ.

İmes San.Sitesi B Blok 205.Sok.No:1
Y.Dudullu - Ümraniye /İstanbul - TURKEY

Tel : + 90 216 313 42 77

Fax : + 90 216 313 42 79

e-mail : info@ideamakina.com.tr